

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
31 January 2002 (31.01.2002)

PCT

(10) International Publication Number  
WO 02/09431 A2

- (51) International Patent Classification: H04N 7/173 (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/US01/22945
- (22) International Filing Date: 19 July 2001 (19.07.2001)
- (25) Filing Language: English
- (26) Publication Language: English (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (30) Priority Data: 60/219,857 20 July 2000 (20.07.2000) US
- (71) Applicant: DIGITALDECK, INC. [US/US]; c/o Daniel Price, Stanwood & Price, 260 Sheridan Avenue, Suite 450, Palo Alto, CA 94306 (US).
- (72) Inventor: GRIGGS, Theodore, L.; 85 Ranch Road, Woodside, CA 94062 (US).
- (74) Agents: OWENS, Jonathan, O. et al.; Haverstock & Owens LLP, Suite 420, 260 Sheridan Avenue, Palo Alto, CA 94306 (US).
- Published: without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MECHANISM FOR DISTRIBUTING CONTENT DATA

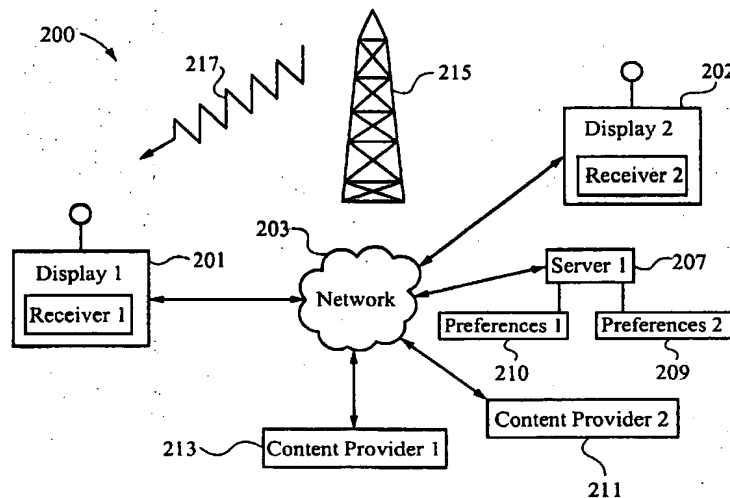

(57) Abstract: The current invention provides a system for distributing content data to user locations. The content data is preferably comprises digital video data that is available on demand from a requesting location. A system server stores user accounts and generates customized program schedules for the user account based user criteria which includes user preferences. Authorized users access their accounts to modify user criteria and to select program transmissions. Preferably, a computer and a television set receive program transmissions from a system network, wherein the computer provides a logical interface between the television set and content data transmitted over the system network.

**MECHANISM FOR DISTRIBUTING CONTENT DATA**Related Application(s):

This Patent Application claims priority under 35 U.S.C. 119 (e) of the co-pending  
5 U.S. Provisional Patent Application, Serial No. 60/219,857, filed July 20, 2000, and entitled  
"MECHANISM FOR DIGITAL VIDEO RENTAL DISTRIBUTION AND CATCHING".  
The Provisional Patent Application, Serial No. 60/219,857, filed July 20, 2000, and entitled  
"MECHANISM FOR DIGITAL VIDEO RENTAL DISTRIBUTION AND CATCHING" is  
also hereby incorporated by reference.

Field of the Invention:

The present invention relates to architectures and systems for and methods of  
distributing content to user locations. More specifically, this invention relates distributing  
program transmissions to user locations from a program schedule account.

Background of the Invention:

There are numerous media services which provide scheduled programs on a viewing  
device, such as a television set. There are standard broadcast services which provide channels  
that can be received by virtually any television tuner through an antenna connector. There  
20 are cable services which typically offer packages of preselected channels to the consumers  
and that required a decoder at the television tuner or on the cable line at an external location.  
Cable services continuously broadcast scheduled programming through a preselected set of  
channels which are received through a cable connector on a television set. There are also a  
number of pay-per-view services which allow costumers to receive non-scheduled one time  
25 program transmissions through the cable network. Other available services include satellite

programming which allow consumers to select on demand pay-per view-programs from a set of available programs.

Each of these programming services require that consumers monitor program availabilities to determine if a desired program is offered. None of the current program services provide for programing that is tailored to individual consumers needs. Further, none of the current services provide the flexibility for consumers to quickly change the scope services and/or program availabilities.

#### SUMMARY OF THE INVENTION:

The current invention provides for the distribution of content data. The current invention preferably allows consumers to readily change the scope of services provided and monitor programs which may be of interest based on individual consumer needs.

Accordingly, the invention is directed to an architecture and system for and a method of distributing content data to user locations. Preferably, the content data comprises program data from one or more content providers. The programs can scheduled programs and/or stored video programs. The content data is preferably distributed to user locations as data transmissions which can be played or viewed at user locations. The program transmissions are preferably transmitted to the user locations by a system network or, alternately, can be selectively broadcast by wireless means to user locations.

The data transmissions preferably comprise digital video data, wherein programs are transmitted to the user locations through a high speed network and played on receiving/display devices with sound and display capabilities. Preferably, a receiving/display device is a digital device configured for receiving digital video data and for viewing a video program downloaded from the network to a memory device. The digital device can be any such conventional device and can include, but is not limited to, a personal computer, PDA, a

web enabled television set or a web appliance. In a preferred embodiment of the instant invention, the receiving device comprises a personal computer and a television set. A personal computer preferably has a video card which provides a logical interface between the television set and digital video data transmitted distributed as video programs over the system network.

The preferred the system of the instant invention comprises a network for customized cataloging of content data availabilities into program schedules. A system network comprises the internet, a private pay-to-use network, a local network, a cable network, a commercial broadcast network or any combination thereof. A system server is coupled to the system network and stores a program schedule and user codes for each user account on the system server. The system server preferably catalogs content data availabilities into program schedules based on the user codes. Preferably, the user codes comprise a set or list of user preferences for each account, wherein user preferences can be submitted to the system server when an account is established on the system server.

A set of user preferences preferably can be modified by an authorized user. User preferences can include, but are not limited to, identified content providers, user likes and dislikes, and preferred times to receive program transmissions. In further embodiments of the instant invention, user preferences are automatically updated based on program transmissions selected through a corresponding account.

Program transmissions are initiated automatically to the user locations according to corresponding program schedules in an account or, alternatively, a user can select a program transmission from an account program schedule.

The system server is preferably in communication with content providers over the system network. The system server surveys content data availabilities and catalogues the content data availabilities into program schedules in accordance with user codes. According

to an embodiment of the instant invention, the content data providers automatically send updated program availabilities data to the system server. Alternatively, the system server accesses various content data providers over the system network and extracts data regarding program availabilities.

5           According to a preferred embodiment of the instant invention, an authorized user may access their account on the system server by a log-in process, whereby the user provides a unique user identification to identify themselves as an authorized the user to the system. Once into the account, the user can preferably modify user preferences and preferably view other account information.

10           Preferably, the server supports a graphical user interface which allows users to point-and-click on program selections from a program schedule within their account. The selection of a program from the schedule then initiates an on-demand program transmission. According to further embodiments, users may identify a location or locations where program transmissions are to be received. This feature would, for example, allow a user to select a  
15           program form work for deliver later at home. A location can be identified by providing a logical address corresponding to a network port or a receiving device.

          In the event that the user is not interested in program selections available from their personal program schedule, the system preferably allows the user to browse and select other available programs over the network. Alternatively, or in addition to the above, the user can  
20           change their user preferences within the account and search the server data base for other available programs based on these new or modified user preferences.

          Program transmissions can be distributed through the system server or distributed from the content provider. The program transmissions can either be immediately played at the user selected locations or, alternatively, are stored on a local storage device for later use.

**Brief Description of the Drawings:**

Figures 1a-c show several network configurations for distributing content data, in accordance with the current invention.

5        Figures 2 shows an architecture for distributing content through a network coupled to a plurality of content providers, in accordance with the instant invention.

Figure 3 illustrates a personal computer interfacing a television for receiving and viewing content data over a network, in accordance with a preferred embodiment of the current invention.

10        Figures 4 illustrates an architecture for distributing content data through a private network, in accordance with an alternative embodiment of the current invention.

Figure 5 illustrates an architecture for controlling transmissions of content data from a first location to a second location, in accordance with the current invention.

15        Figure 6 is a flow-chart outlining the steps for distributing content data, in accordance with a method of the instant invention.

Figure 7 is a flow-chart outlining the step for selecting a program in accordance with a preferred method of the instant invention.

Figure 8a-b are schematic diagrams of features on the local side and the server side of a system for distributing content data, in accordance with the current invention.

20        Figure 9 illustrates a block diagram of computer with a video card for interface in a viewing device, in accordance with the preferred system of the current invention.

**Detailed Description of a Preferred Embodiment:**

25        The architecture of the instant invention utilizes a server unit coupled to at least one content provider. The server unit provides a central hub for content data distribution. The

server unit monitors content data availabilities from the at least one content provider and organizes the content data availabilities into customized program schedules in accordance with user codes.

The user codes preferably provide for a selection of services desired from the at least one content provider. The user codes can also provide for the selection of content data based on information about the intended user, wherein the content data corresponds to scheduled or on demand programs, which may viewed or played at user locations.

A user preferably can view or access their account and select programs to be transmitted to a predetermined location and/or modify account preferences including, changing content providers and/or services provided therefrom. Figures 1a-c will now be used to show several different ways in which a system server may be coupled to content providers for distributing content data to user location, in accordance with the instant invention.

Figure 1a shows an architecture 100 for distributing content data, in accordance with an embodiment of the invention. The architecture 100 preferably has central network 103. The central network 103 can be either a private or public access network, such as the internet. A system server 105 is coupled to at least one content provider 111 through the network 103. In the architecture 100 shown in Figure 1, a user can access their account at the server 105 via the network 103 from a device 101, which is also configured to receive program transmissions. Alternatively, the user can access their account at the server 105 from a separate device (not shown). Preferably the user can change preferences 107 and 109 and or select a programs by from their personal account. Preferably, the system server 105 instructs the content provider 111 via the network 103 to route a program transmission to the device 101.

In accordance with one embodiment of the current invention, the system server 105

authorizes and initiates program transmissions to the device 101 by providing the content provider 111 with a logical address of the device 101 or location of the device 101 on the network. Alternatively, the server causes the device 101 to authorize and initiate program transmissions from the provider 111 to the device 101.

5        According to an alternative embodiment of the instant invention, program transmissions are automatically initiated from the content provider 111 to the device 101 based on preferences 107 and 109 and/or a program schedule without requiring the user to make a program selection.

10        Figure 1b show an alternative architecture 120 for distributing content data, in a accordance with the current invention. The architecture 120 has a server 125 that stores preferences 127 and 129 which are used to creates customized program schedules. The architecture 120 has a first network 133, which is preferably a public network, such as the internet, wherein a user can access their account through the public network 133. The system server 125 and a content provider 131 are coupled through a separate network 135 which  
15        may be a local area network or other restricted access network. The network 135 is preferably configured to provide the server 125 with content data availabilities from the content data provider 131. The network 134 provide a mechanism for the distribution of program data from the content provider 131 to a receiving device 121. Preferably, the network 133 is a private pay-for-user network.

20        Figure 1c show an architecture 140 for distributing content data, in accordance with another alternative embodiment of the current invention. The architecture 140 preferably comprises a server unit 149 coupled to a receiving device 141 through a network 143. The server unit 149 comprises a content source 147 and a system sever 145, wherein the content source 147 provides programs to the device 141 through the system server 145. The system  
25        server 145 allocates content data availabilities into program schedules in accordance with



stored preferences 146 and 148 and transmits programs automatically, by way of user selections from schedules or a combination thereof.

Figure 2 shows an architecture 200 for distributing content data to multiple devices 201 and 202 from multiple content providers 211, 213 and 215. The content providers 211 and 213 transmit content data to devices 210 and 202 through a network 203. The network 201 is preferably a private pay-for-use network or, alternatively, is a public network, such as the internet. The devices 210 and 202 preferably have receivers for receiving content data and displays for displaying processed or unprocessed content data received at a user location.

Still referring to Figure 2, a broadcast content provider 215 broadcasts content data 217, such as television program transmissions or any other kind of broadcast content data. The provider 215 can selectively operate independently of the system server 207 or, alternatively, can be coupled to the server 207, wherein the server 207 provides instructions to the provider 215 to initiate selective broadcasts to one or more of the devices 201 and 202. Accordingly, the server 207 is configured to program the receiver device 201 to receive broadcast data 215 from the content provider 213 according to a schedule. The server 207 preferably stores customized program schedules generated in accordance with user preferences 210 and 209.

Figure 3 shows an architecture 300 for distributing content data, in accordance with a preferred embodiment of the current invention, wherein the receiver device 304 comprises a personal computer 302 and a television set 305. The personal computer 302 can be coupled to a network 303 and configured to access the server 307 where a program schedules are stored in personal accounts. A content provider 311 is preferably is coupled to the network 303 and configured to transmit program data via the network 303 to the device 304 in accordance with the program schedules. As described previously, program schedules are preferably generated in accordance with user preferences 309 and 310 which are also stored

on the server 307.

Figure 4 shows an architecture 400 for distributing content data, in accordance with an alternative embodiment of the current invention. The architecture 400 can include multiple servers 407 and 411. The architecture 400 preferably includes a network 403 that is preferably a private network for users subscribing to the account at one or more of the servers 407 and 411. Each server 407 and 411 is preferably coupled to content data provider 415 and 417. The servers 407 and 411 monitor availabilities of content data from the content data providers 415 and 417 and compile customized schedule catalogs for each set of user preferences 410 and 412. The devices 401 and 402 preferably have receivers for receiving programs and displays for displaying process program data. A user can access their user account and view their program schedule therein via the internet 420 from one or more of the receiving devices 401 and 402 or, alternatively, from a separate device (not shown). The user can then select which programs are to be transmitted to the receiving devices 410 and 402 and/or modify account information. Preferably, each user account has its own user list of associated preferences and the server store multiple accounts corresponding to multiple user locations.

In an alternative embodiment of the instant invention, program schedules are assigned to or belong to the devices 401 and 402, wherein programs are automatically transmitted to devices 410 and 402 according to the programs schedule assigned to the devices.

Accordingly, a user sets up a list of preferences for each device 401 and 402 and program transmissions which are receivable at each of the device 401 and 402 as determined by program schedule generated for each device 401 or 402. Preferably, the servers 407 and 411 are responsible for controlling the authorization of the device 401 and 402 to receive a program transmission from the providers 412 and 415

Figure 5 shows an alternative architecture 500 for distributing content data, in

accordance with the instant invention. In the architecture 500, a server 510 receives broadcast content data 517 and 518 from broadcast content providers 515 and 516. In this way, the sever 510 is an "intermediate content provider" for provisioning content data transmissions 517 and 518 indirectly to a receiving device 501. The distribution of broadcast content data is preferably determined by a program schedule stored on the server 510 which is based on a corresponding list of user or device preferences, as described in detail above.

Still referring to Figure 5, content providers 511 and 513 are coupled to the network 503 for transmitting programs, to the receiving device 501. The programs are preferably digital video programs. The receiving device 501 preferably comprises a computer 504 and a television 502. Users can access their schedules over the network 503 and modify the preferences 508 and 509 including their choice of which providers 511 and 513 and select programs to be received from each of the providers 511 and 513.

The architecture 500 can provide for the ability to select a second receiving location 509 to receive a program transmission. The second receiving location 509 is preferably coupled to the network 503 and/or is configured to receive broadcast content data from at least one of the providers 511, 513, 515 and 516. When program transmissions are digital video program transmissions, the second location is preferably identified by providing the server 510 with a logical address corresponding to the second receiving location 509.

Figure 6 is a schematic block diagram 600 outlining steps for distributing content data, in accordance with a method of the instant invention. When the user first sets up an account at a the system server in the step 601, there is preferably a request for user information. The request for user information can be made by telephone, e-mail, ground mail, surveys or any other suitable means including unsolicited means. Preferably, users can visit a web site and set up their own account. User information can include, but is not limited to provider selections and service selections. Additionally, user information preferably

includes a list of preferences. User preferences can include information such as the type of programs in which the user is interested, the user likes and dislikes and/or preferred times to receive program transmissions. The user preferences may also specify a user locations to receive program transmissions. After the account is established, the system preferably provides the user with an estimate of the cost and a list of the subscribed services and a personal identification number.

In the step 603, a program scheduling criteria is developed. The program scheduling criteria can be any simple or complex algorithm, but preferably includes weighting factors for user preferences acquired in the step 601. For example, in the step 601 a user inputs that their professional interests include healthcare. Thus, programs which deal with healthcare issues may be given high priority in the customized program schedule developed in the step 609. If in the step 601 the user inputs that they do not like sports, then sports programs may be eliminated from the customized program schedule or, alternatively, are give low priority in the customized program schedule developed for that user in the step 609.

After the program scheduling criteria is generated in the step 603, then in step the 605, the server reviews program availabilities for all of the designated content providers. The server can obtain program availabilities automatically from the content provider or, alternatively, extract program availabilities over the network. In yet a further embodiments, the program availabilities can be entered into the server manually. Program availabilities are preferably updated at the server as new programs become available or as program availabilities change. After the program availabilities are compiled at the server in the step 607, the server catalogs the programs into a customized program schedule according to the user criteria.

Customized program schedules are preferably viewable over the system network, wherein the user program schedule is displayed on a display device with a graphical user

interface. Further, the customized program schedule can have any of a number or formats. The schedule can display program availabilities corresponding to a day a week, a month or other suitable time frame. Program availabilities can be tabulated, or organized into blocks or categories, such as sports or news. In accordance one embodiment of the instant  
5 invention, the user can select and/or modify the schedule format. While it is preferable that customized program schedules are viewable over the system network, the program schedules can be provided to users by any other suitable method including mail and e-mail.

After the customized program schedule is provided to the user in the step 609, then in the step 611 the user can select a program for initiating transmission of a program to the user  
10 location. Alternatively, a program is transmitted to the user location without requiring the user to make a selection.

Figure 7 shows a flow-chart 700 outlining the step for selecting a program in accordance with the preferred method of the instant invention. In the step 701, a user preferably can log into their personal account by providing a secured user code, such as a  
15 user identification number. Then in step 703, the user can view their personal program schedule. In the step 705, the user can select programs from their schedule. Preferably, the program schedule is supported by a graphical user interface which allows the user to point-and- click on a displayed program icon to select a program. After the program is selected in the step 705, then in the step 707 transmission of the program content data to user location is  
20 initiated.

After viewing the personal program schedule in the step 703, the user can preferably modify the account and/or user preferences. By refreshing the account, the server re-compiles program availabilities based on the new account information or modified preferences. It is also preferable that the user can search a server data based for alternative  
25 programs, which are not displayed in the personal program schedule, using a simple search

engine.

After the program is selected in the step 705, then in the step 707 the transmission of the program to the user location is initiated by any number of conventional mechanisms including, but not limited to, initiating a broadcast of a program, decoding a local receiver to receive an encrypted broadcast, transmitting data to a port on a system network or be routed from the server to a receiving device or alternatively can be distributed directed from the content provide which receives authorization for the server to transmit programs to the user location. In accordance with a preferred embodiment of the invention, the system for distributing content data is a pay-per-view system, wherein the user is automatically billed for each program transmission, as described in detail below.

Figure 8a-b, shows the elements on the local side 800 and the server side 810 of a system for distributing content data, in accordance with the instant invention. The catalog interface 801 is coupled to an authentication server 806 to verify the identity of the user. The catalog interface 801 is preferably accessible from both the local side 800 and the server side 810 of the system. After the user is identified, then the catalog interface 801 will collect information about the user, preferably including payment information and a credit card number. The catalog interface 801 will then send the information the authentication server 806 which stores the user information in a user data base 811. The catalog interface 801 can also check the payment information with a billing server 807 before validating the user's account.

After the user has established a valid account, the catalog interface 801 will query the directory server 808 for a list of available programs and preferably provided the list of available programs in a menu format to the user through a viewing device 805. The user can select a program choice from the menu through the catalog interface 801, whereby the catalog interface 801 communicates the choice to directory server 808. The directory server

808 then communicates the cost of program to the billing server 807.

If the billing server 807 is unable to bill for the program selection, the billing server 807 will communicate the failure back to the directory server 808, and the directory server 808 will communicate the failure to the catalog interface 801. The catalog interface 801 will then communicate the billing failure to the user and wait for another program selection.

In the event that the billing server 807 successfully bills the user for the program section, then the billing server 807 communicates to the directory server 808 that the selection has been accepted. The directory server 808 then communicates the selection to media transport system 809 and tells the media transport system 809 to authorize streaming of the content data, which is preferably digital video content data.

After the streaming of video data is authorized by the media transport system 809, then the media transport system 809 allows the directory server 808 to access the video data. The directory server 808 then communicates to the catalog interface 801 that payment was received for the video program and that the video data is now authorized to be transmitted.

To work through fire walls that might exist on the local side 800 of the system, the media manager 803 is preferably coupled to the media transport system 809, such that after the catalog interface 801 informs the user that the program has been paid for and that the video data is ready to be transmitted, the catalog interface 801 sends an authorization confirmation to the media manager 803. The media manager 803 then establishes a communication channel with the media transport system 809 and communicates a confirmation of the authorization to the media transport system 809 which starts streaming the video data to the media manager 803 from a remote storage device 810. The media manager 803 receives the stream of video data and preferably stores the video data on a local storage device 804. The remote storage device 810 can be a single storage device or any number of storage devices that are accessible over the system network (not shown).

In accordance with an embodiment of the invention the video data is encrypted or otherwise marked with identifying information that relates a copy of the content data to the user account. Further, while components on the local side 800 can reside on the same processor device, preferably the media manager 803 and the local storage device 804 reside on a home server device and the catalog interface 801 and the playback interface 802 reside on a desktop computer.

While the data stream is being downloaded and saved to the local storage device 804, the catalog interface 801 and/or the playback interface 802 can be used to monitor the download progress. Further, at any time after video download is started, the playback interface 802 can be used to play the video data. However, if the download or streaming rates are slower than the payback rate, the entire video may not be available for viewing at any given time.

Preferably the playback interface 802 is used to select a viewing device 804, wherein the playback interface 802 receives input instruction from any suitable control device 812. For example, the viewing device 805 is a monitor on a desktop computer or a television set. The control device 812 may comprise an internet browser, a software application program, an infrared remote controller a cursor controller and/or a key board.

The playback interface 802 preferably queries the media manager 803 for what videos are stored on the local storage device 804 and displays the stored video program to the user through the catalog interface 801.

When a playback is requested by the user through the control device 812, then the playback interface 802 communicates the request to the media manager 803. The media manager 803 then communicates authorization to the media transport system 809 and the media transport system 809 authorizes the playback of the video data.

Alternatively, the playback request can be denied if an authorization time limit has



expired or if the user is not authorized to view the selected playback video data. In the event that the playback is authorized, the media transport system 809 can pass encryption keys to the media manager 803 required to playback the video data when the video data is encrypted.

After the media manager 803 streams the video and the user is finished viewing the video program on the viewing device 805, the user can remove the video data from the local storage device 804. Preferably, the user communicates a request to remove the video data from the local storage device 804 through the control device 812. The control device 812 then communicates the request to the playback interface 802. The playback interface 802 tells the media manager 803 to remove the video from the local storage device 804. The media manager 803 then confirms with the playback interface 802 that the video data has been removed from the local storage device 804 and communicates the result to the user through the viewing device 805.

Figure 9 illustrates the preferred local system 900 at a user location for processing video data streams and display processed video data streams at a viewing device 25, in accordance with the instant invention. The system preferably utilizes a computer 910 with a video card 920. The video card 920 preferably has graphical output connector 26 and computer display logic 16 for supporting and display program graphics on a computer monitor. The viewing device 25 is preferably a television set or computer monitor connected to the computer 910 through a video output connector 23. Using a viewing control device 12, such as a key board, a cursor control device (e.g. computer mouse) or an infrared control device, as described above, the user sends a request to the a remote server that he/she wants to watch a video on the viewing device 25. The streaming media mixer logic 13 retrieves the stored data stream stored on the disk storage device 24 and sends the video data to the CPU interface 15. The CPU interface 15 sends the video data to the digital stream compression/decompression logic 18 on the video card 18. The digital stream

compression/decompression logic 18 decompresses the video data and, if necessary, sends the video data to the display logic 19 to be converted to a displayable signal. The displayable signal is then sent through the stream media logic mixer 13 to be displayed on the viewing device 25.

5 When a request is submitted from the control device 12, the display logic 16 creates a graphical display frame in its memory with the appropriate content. The display frame is sent to the streaming media mixer logic 13. The streaming media mixer logic 13 preferably contains the same compression/decompression algorithms as the digital stream compression/decompression logic 18. Instead of simply forwarding the compressed display  
10 frame to the CPU interface, the streaming media mixer logic 13 uses its logic to create and to decompress the display frame. The streaming media mixer logic 13 then overlays a graphical data frame from the display logic 22 onto the decompressed display frame. The streaming media mixer logic 13 compresses the new combined display frame and sends the combined display frame to the viewing device 25.

15 For full motion video, the streaming media mixer logic 13 preferably produces the combined display frames at a rate of thirty frames per second or greater. If the computer 910 used does not have sufficient processing capabilities to allow for processing of full motion video, the same display frame is displayed for some multiple number of times and the subsequent intermediate frame(s) are ignored at the CPU interface.

20 In other cases, the user can watch a direct video program on the viewing device 25, wherein the video data is arriving on the video card from a video input connector 14 or through an antenna input connector 21 from a television tuner logic 17. Accordingly, a user request arrives from the control device 12 and the content data is routed through the display logic 119 and then to the video output connector 23 to be displayed on the viewing device 25.

25 In this example, the computer 900 does not process the video data.

In a third case, a user submits a request from the control device 12 and the interface display logic 22 generates the appropriate graphical display data frame. When graphical display data frame is presented to the streaming media mixer logic 13, the streaming media mixer logic 13 sends a message to the video card 920 through the CPU interface 15. The  
5 video card 920 accepts the signal being routed through the display logic 19 and instructs the digital stream compression/decompression logic 18 to digitize and, optionally, compressed graphical display data frame before sending the graphical display data frame to the display logic 19 through the CPU interface 15 to the streaming media mixer logic 13.

The streaming media mixer logic 13 now has the compressed graphical display data  
10 frame and uses the same process described above to overlay a graphical display frame from the user interface display logic 22 on to the current display frame and sends the combined display frame through the CPU interface 15 to be decompressed by the digital stream compression/decompression logic 18. The digital stream compression/decompression logic 18, then sends the uncompressed combined display frame to the display logic 19, which  
15 outputs signals to the video output connector 23 to be displayed on the viewing device 25.

The present invention has been described in terms of specific embodiments incorporating details to facilitate the understanding of the principles of construction and operation of the invention. Such reference herein to specific embodiments and details thereof is not intended to limit the scope of the claims appended hereto. It will be apparent to those  
20 skilled in the art that modifications can be made in the embodiment chosen for illustration without departing from the spirit and scope of the invention.

Claims

What is claimed is:

- 1 1. An architecture for providing content data to a user, the architecture comprising:
  - 2 a. a server unit for storing a plurality of user codes and for generating program  
3 schedule for each user code; and
  - 4 b. a content source unit coupled the server for providing dynamic program  
5 schedule data to the server unit, wherein the server unit is configured to  
6 compile the dynamic program schedule data for each of the user codes to  
7 generate the program schedules.
- 1 2. The architecture of claim 1, wherein the user operates the server unit to select content  
2 data from at least one of the program schedules through the server.
- 1 3. The architecture of claim 2, wherein the content source unit is coupled to a network  
2 comprising a plurality of network ports, wherein selected content data is transmitted  
3 to the user through at least one of the plurality of network ports.
- 1 4. The architecture of claim 3, wherein the at least one of the plurality of network ports  
2 is identified by providing the server unit with a logical address.
- 1 5. The architecture of claim 4, wherein the user accesses the at least one program  
2 schedule by providing the server with a unique user identification number through the  
3 network.
- 1 6. The architecture of claim 1, wherein the content source unit broadcasts the content

2 data to a user location.

1 7. The architecture of claim 6, wherein the user identifies the user location by providing  
2 the server unit with a logical address.

1 8. The architecture of claim 7, wherein the logical address corresponds to a receiving  
2 device at the user location.

1 9. The architecture of claim 1, wherein the content source unit and the server unit are  
2 coupled through a content network, the content network comprising a plurality of  
3 network ports for transmitting content data, wherein the user is capable of selecting at  
4 least one of the plurality of network ports for receiving the content data selected from  
5 the at least one of the program schedules.

1 10. The architecture of claim 9, wherein the content network is a private pay-for-use  
2 network.

1 11. The architecture of claims 10, wherein the server unit is further coupled to the internet  
2 and wherein the content data is selected from the at least one of the program  
3 schedules through the internet.

1 12. The architecture of claim 11, wherein the at least one of the program schedules is  
2 accessed by providing the server unit with a unique user identification number.

1 13. The architecture of claim 9, wherein the user selects the at least one of the network

- 2 ports by providing a logical address corresponding to a receiving device.
- 1 14. The architecture of claim 9, wherein the content network comprises the internet.
- 1 15. The architecture of claim 1, wherein the user codes comprise user preferences.
- 1 16. The architecture of claim 15, wherein the content source unit comprises a plurality of  
2 content providers and wherein the preferences comprise selected providers from the  
3 plurality of content providers.
- 1 17. The architecture of claim 1, wherein the program schedules are automatically  
2 updated.
- 1 18. The architecture of claim 1, wherein the user codes are automatically updated based  
2 on selected content data.
- 1 19. The architecture of claim 1, wherein the content source unit is configured to transmit  
2 digital video content data selected by the user from the at least one of the program  
3 schedules.
- 1 20. The architecture of claim 1, wherein the content source unit is configured to transmit  
2 broadcast content data selected by the user from the at least one of the program  
3 schedules.
- 1 21. A system for providing a customized program schedule to a remote user location, the

2 system comprising a networked server configured for surveying available programs  
3 from content providers and further for automatically generating the customized  
4 program schedule based on user criteria, wherein the system is configured to allow  
5 the user to select program transmissions from the customized program schedule.

1 22. The system of claim 21, wherein the program transmissions are initiated by a log on  
2 procedure, wherein the remote user provides the server with a unique user  
3 identification number.

1 23. The system 22, wherein the program transmissions are initiated by further providing a  
2 logical address at the remote user location.

1 24. The system of claim 21, wherein the user criteria comprises the user's availability at  
2 the remote user location and content data previous program transmissions to the  
3 remote user location.

1 25. The system of claim 21, wherein the customized program schedule is periodically  
2 updated.

1 26. The system of claim 25, wherein the customized program schedule is periodically  
2 updated based on the programs transmissions.

1 27. The system of claim 21, wherein the server surveys available programs from the  
2 content providers via the internet.

- 1 28. The system of claim 21, wherein the program transmissions comprise digital video  
2 content data to the user location.
- 1 29. The system of claim 21, wherein the program transmissions comprise broadcast  
2 content data to the remote user location.
- 1 30. A system for generating a program schedule comprising:  
2 a. means for identifying a user criteria;  
3 b. means for generating a program schedule based on the user criteria;  
4 c. means for communicating the program schedule to a user location; and  
5 d. means for allowing the user to select programs from the program schedule at  
6 the user location.
- 1 31. The system of claim 30, wherein the means for generating the user criteria includes a  
2 survey of a user's preferences including subjects of interest in the categories of sports  
3 and entertainment.
- 1 32. The system of claim 30, wherein the means for generating the user criteria includes a  
2 history of programs previously received at the user location.
- 1 33. The system of claim 30, wherein the means for generating the program schedule  
2 based on the user criteria comprises a server, wherein the server stores the program  
3 schedule.  
4
- 5 34. The system of claim 33, wherein the means for communicating the program schedule



6 to the user location comprises a network.

1 35. The system of claim 34, wherein the means for selecting programs from the program  
2 schedule comprises a graphical user interface operated from the server.

1 36. A method of scheduling content data comprising:

2 a. storing client preferences for a client at a server location;

3 b. cataloging available content data from selected content providers based on the  
4 client preferences; and

5 c. transmitting the available content data to a remote client location.

1 37. The method of claim 36, wherein communicating the available content data to the  
2 remote client location comprising providing the server with a user identification and a  
3 logical address corresponding to the remote client location.

1 38. The method of claim 37, wherein the logical address corresponds to a receiving  
2 device at the remote location.

1 39. The method of claim 37, wherein the logical address corresponds to a network node at  
2 the remote location.

3 40. The method of claim 36, wherein communicating the available content data comprises  
4 transmitting digital video data over a network.

1 41. The method of claim 40, wherein the network comprises the internet.

1 42. The method of claim 36, wherein the available content data is transmitted to a

2 personal computer at the remote location.

1 43. The method of claim 42, wherein the available content data is automatically  
2 transmitted to the personal computer.

1 44. The method of claim 43, further comprising storing the available content data on the  
2 personal computer.

1 45. A method of scheduling content data:

- 2 a. providing a list of preferences to a remote server, wherein the remote server  
3 maintains a catalogue of content data based on the list of preferences;  
4 b. identifying a user location; and  
5 c. transmitting cataloged content data to the user location.

1 46. The method of claim 45, wherein the cataloged content data is automatically  
2 transmitted to the identified user location.

1 47. The method of claim 45, wherein the cataloged content data comprises digital video  
2 data.

1 48. The method of claim 45, wherein the cataloged content data is transmitted to the  
2 remote user location via the internet.

1 49. The method of claim 45, wherein the remote server maintains the catalogue of content  
2 data by surveying available content data from a plurality of content providers.

3 50. The method of claim 49, wherein the available content data is transmitted to the

4 identified user location from at least one of the plurality of content providers.

1 51. A system for providing content data comprising:

- 2 a. a network coupled to at least one content provider;
- 3 b. a remote server coupled to the network and comprising;
- 4 i. a memory device for storing a plurality user identification codes
- 5 wherein each user identification code corresponds to a list of user
- 6 preferences; and
- 7 ii. a program for generating content data schedules for each of the
- 8 plurality of user identification codes based on each corresponding list
- 9 of user preferences wherein a user can access one of the content data
- 10 schedules by providing the at least one of the user identification code
- 11 and wherein the user can selected programs corresponding to one of
- 12 the content data schedules to be transmitted to a remote location; and
- 13 c. a device for receiving the selected programs at a remote location.

1 52. The system of claim 51, wherein the device for receiving the selected programs




2 comprises:



- 3 a. a computer comprising a video card; and
- 4 b. a viewing device couple to the computer.

1 53. The system of claim 52, wherein the video card provides for television tuner logic and

wherein the viewing device is a television.

1/9

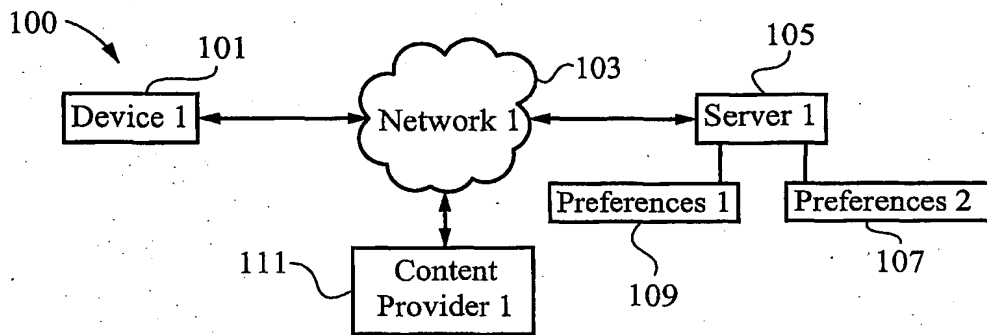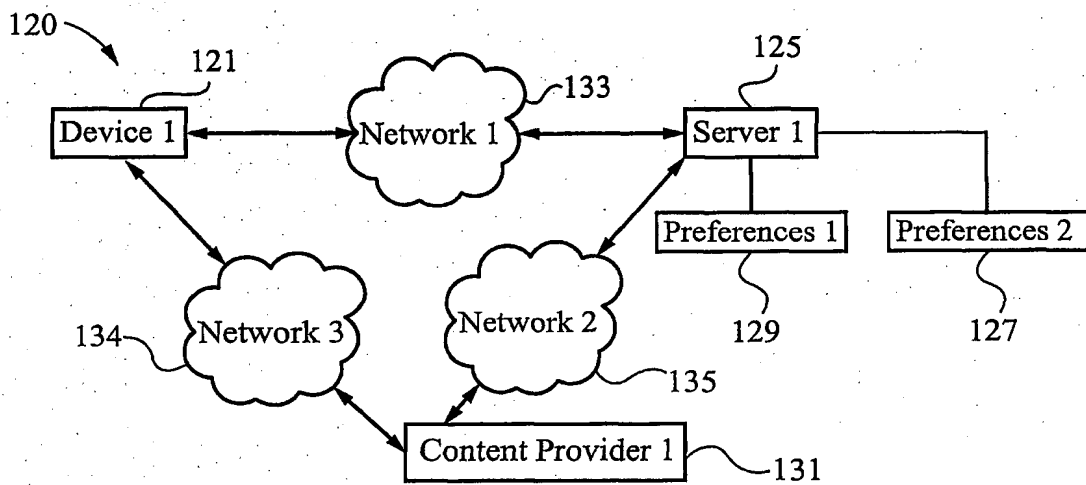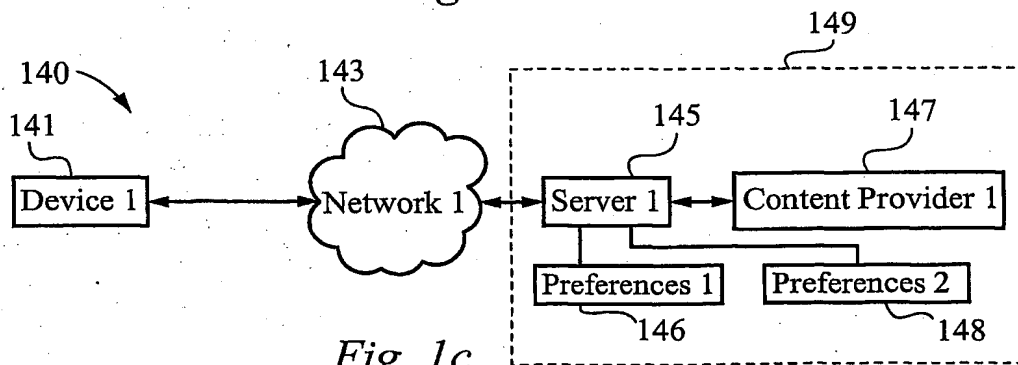*Fig. 1a**Fig. 1b**Fig. 1c*

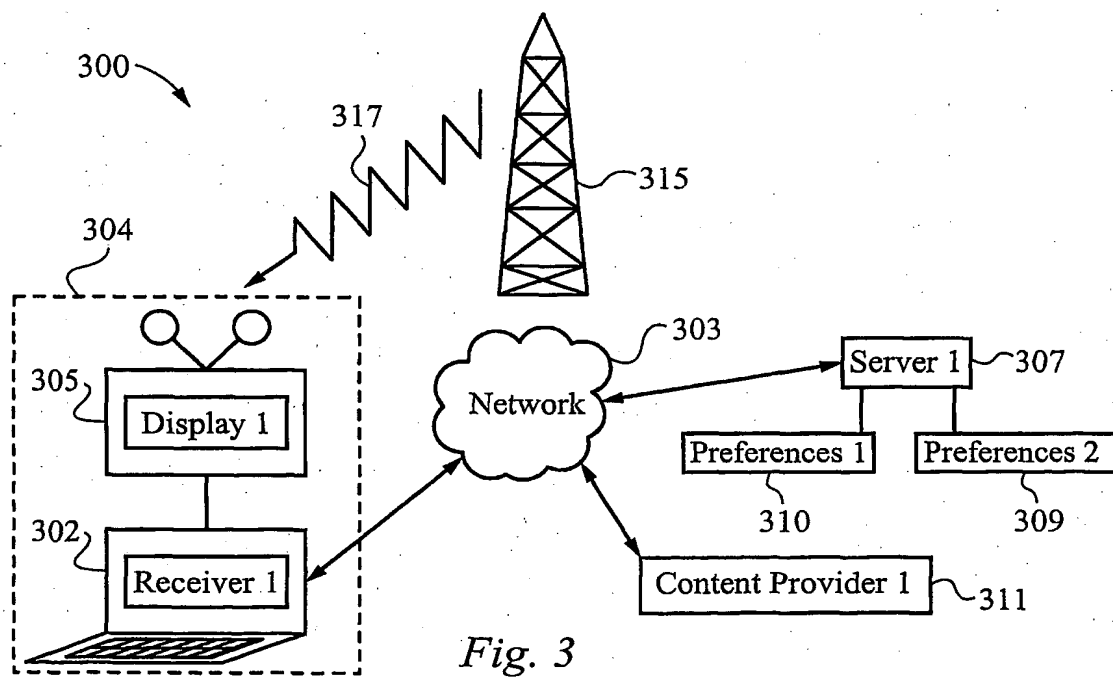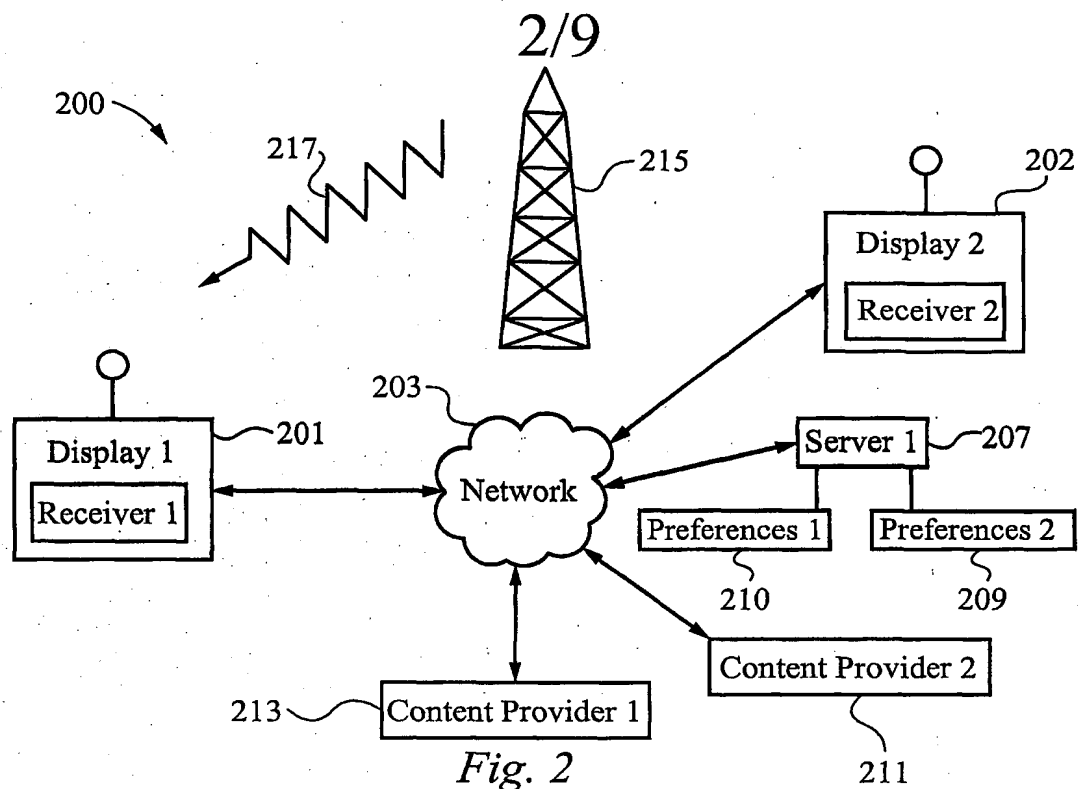

3/9

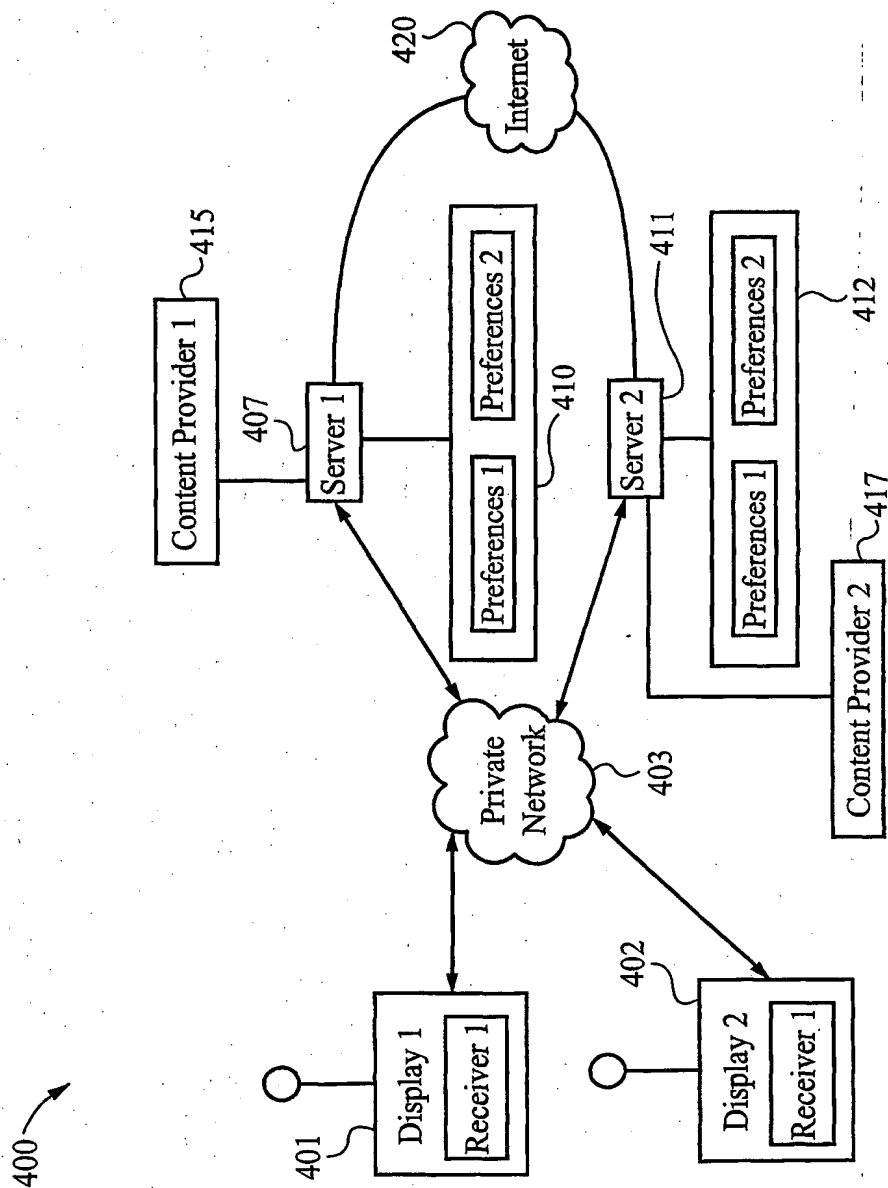


Fig. 4

4/9


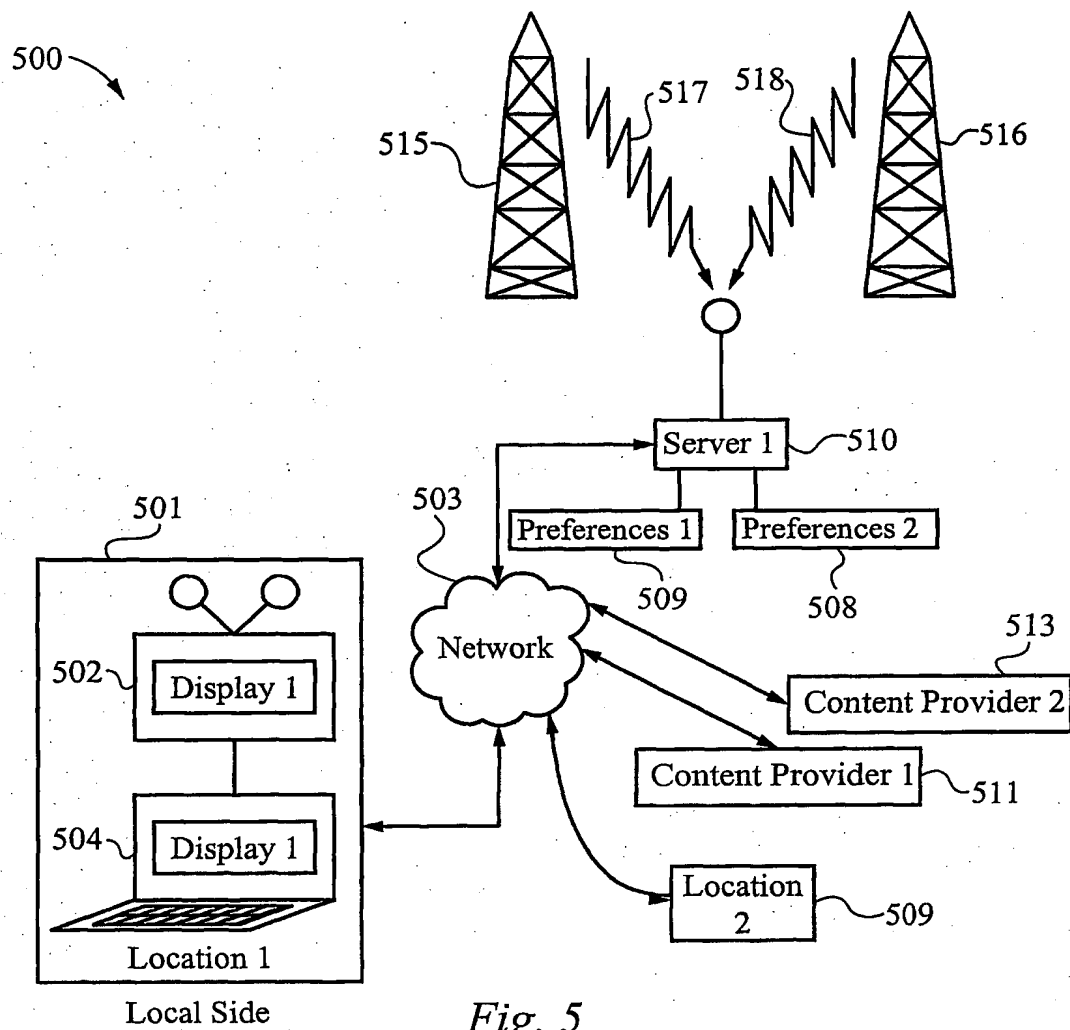



Fig. 5

5/9


*Fig. 6*

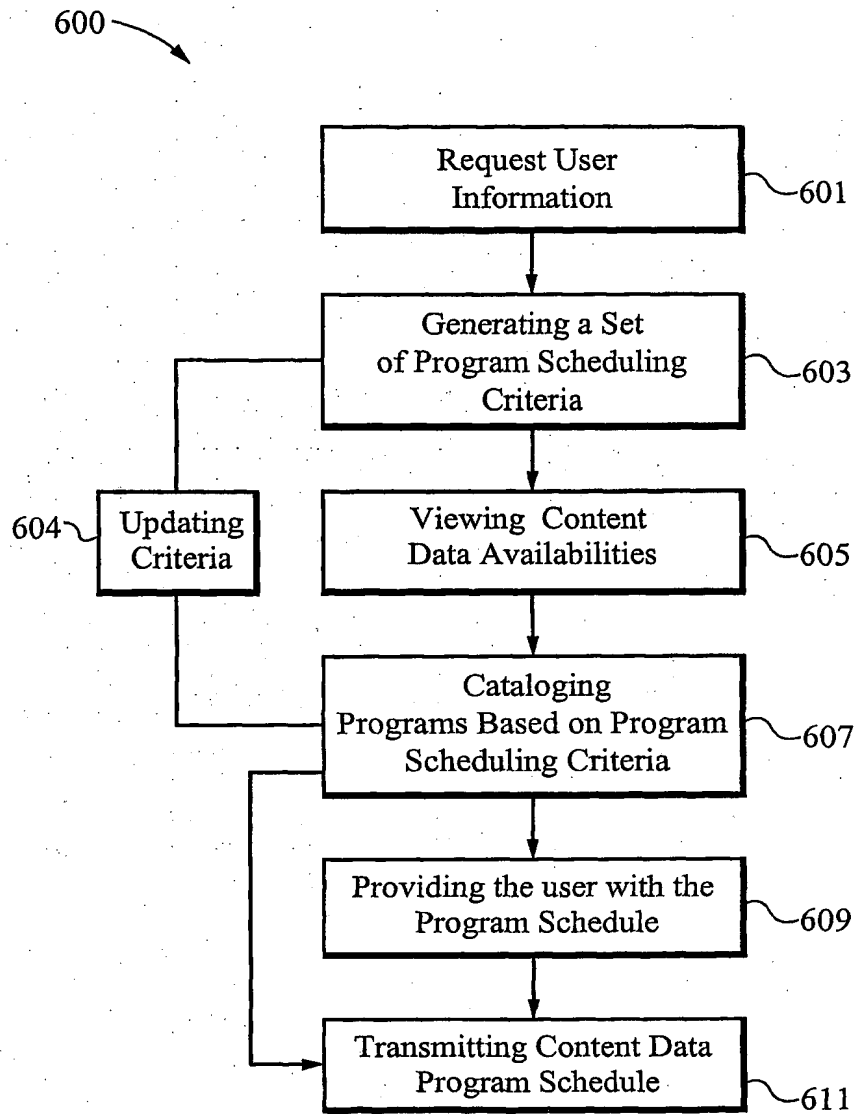

6/9

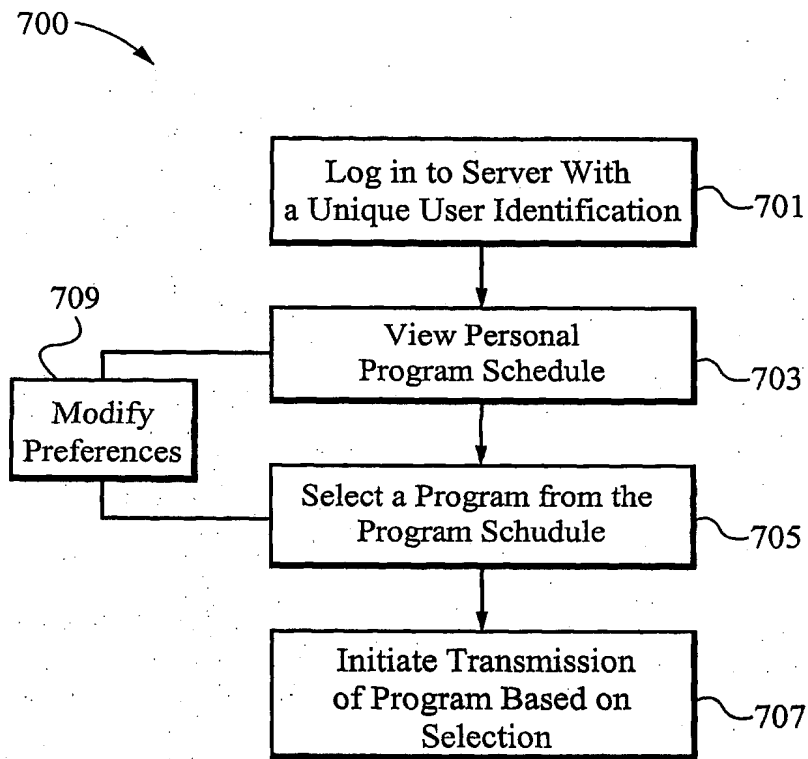
*Fig. 7*

7/9

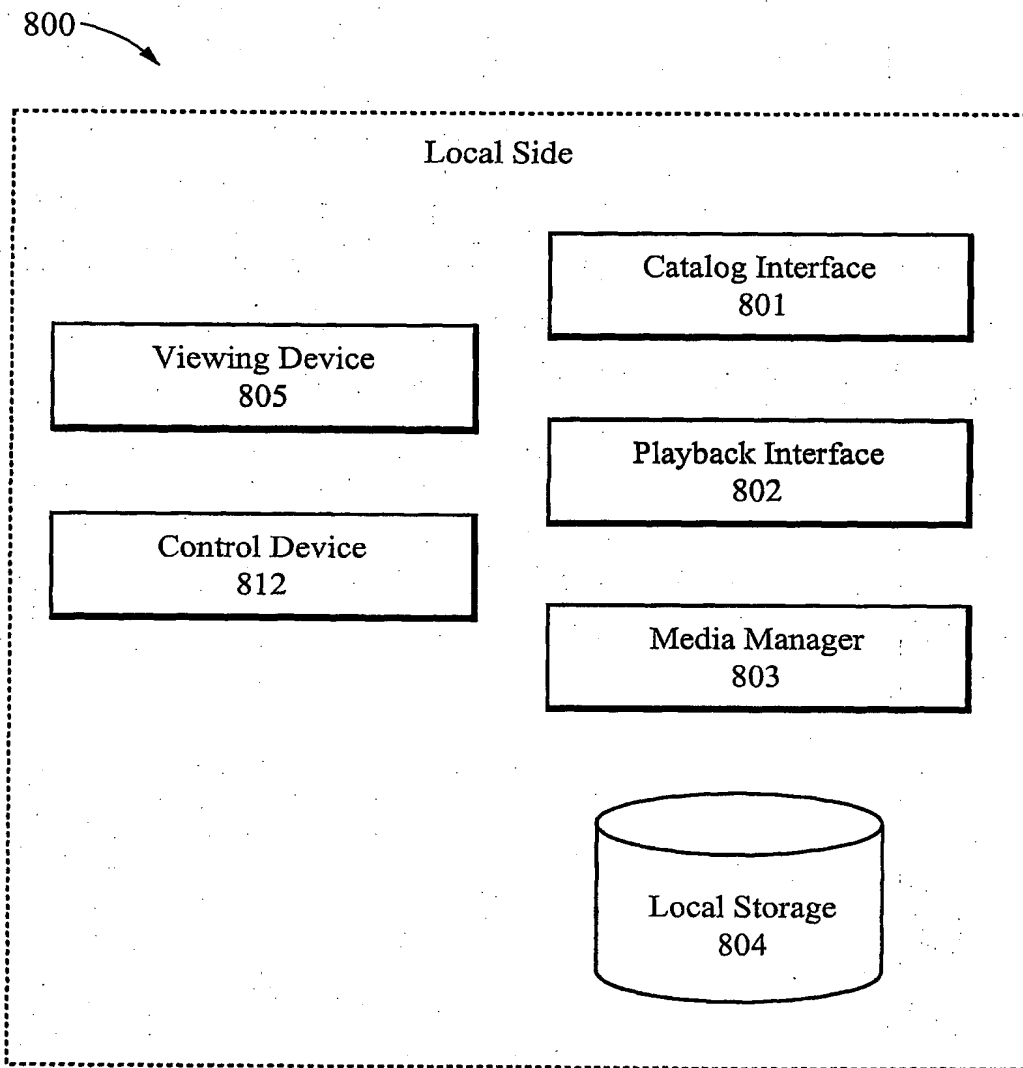*Fig. 8a*

8/9

810

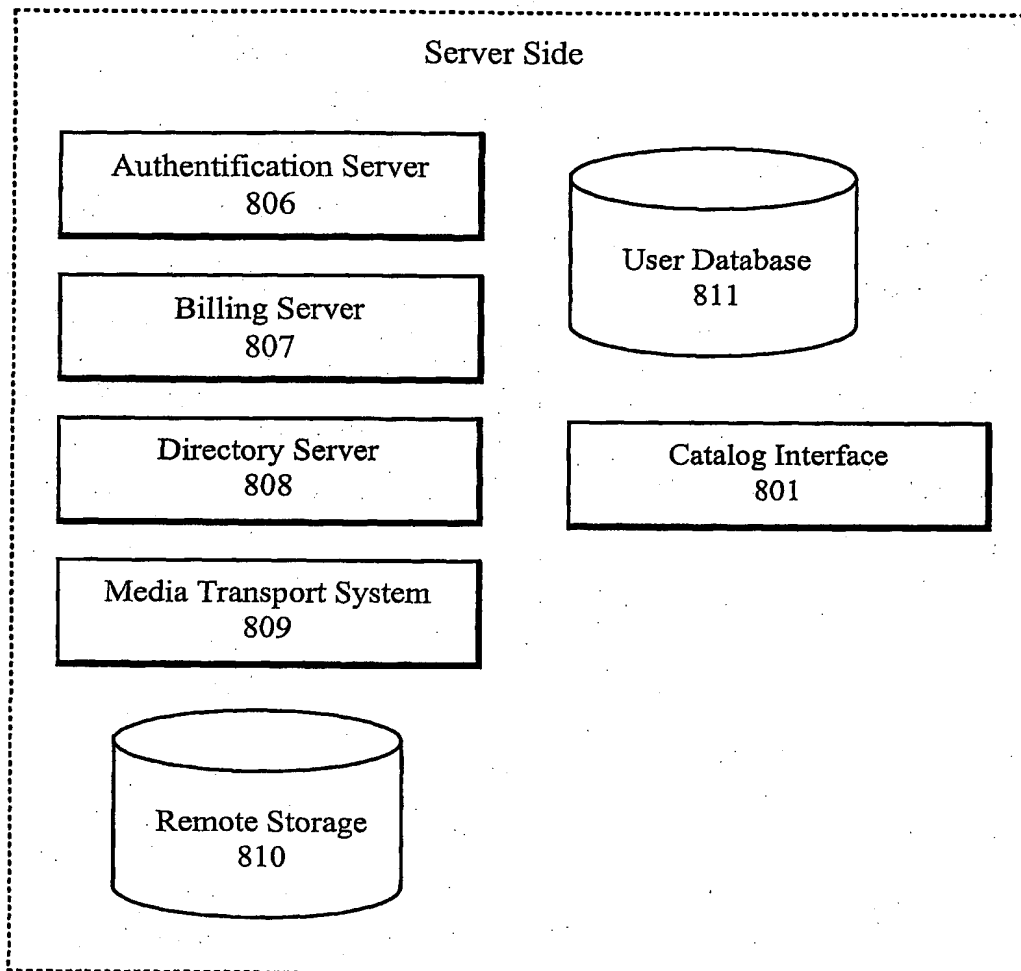*Fig. 8b*

9/9

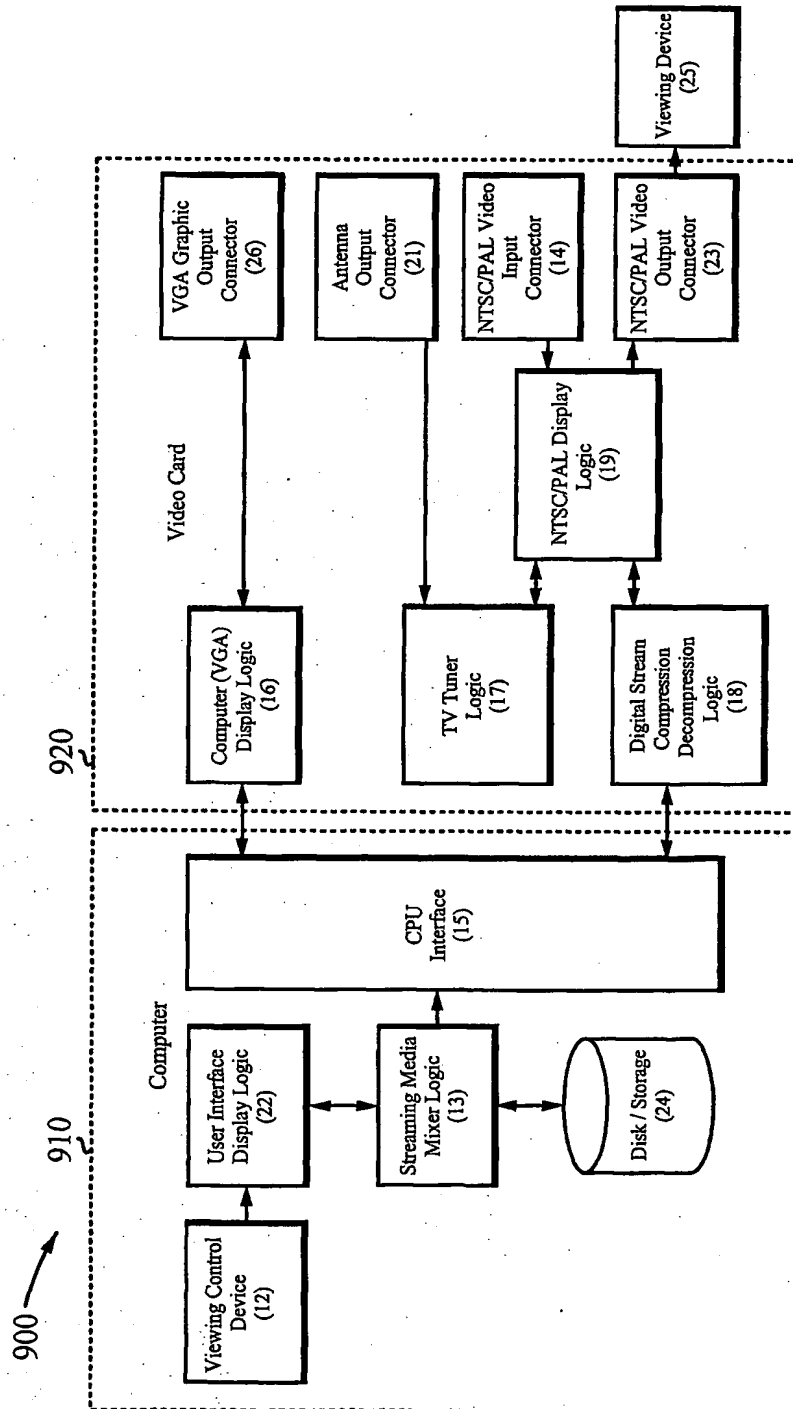


Fig. 9

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 January 2002 (31.01.2002)

PCT

(10) International Publication Number  
WO 02/09431 A3

(51) International Patent Classification<sup>7</sup>: H04N 7/173

(21) International Application Number: PCT/US01/22945

(22) International Filing Date: 19 July 2001 (19.07.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/219,857 20 July 2000 (20.07.2000) US

(71) Applicant: DIGITALDECK, INC. [US/US]; c/o Daniel Price, Stanwood & Price, 260 Sheridan Avenue, Suite 450, Palo Alto, CA 94306 (US).

(72) Inventor: GRIGGS, Theodore, L.; 85 Ranch Road, Woodside, CA 94062 (US).

(74) Agents: HAVERSTOCK, Thomas, B. et al.; Haverstock & Owens LLP, 162 North Wolfe Road, Sunnyvale, CA 94086 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

(88) Date of publication of the international search report:  
16 May 2002

[Continued on next page]

(54) Title: MECHANISM FOR DISTRIBUTING CONTENT DATA

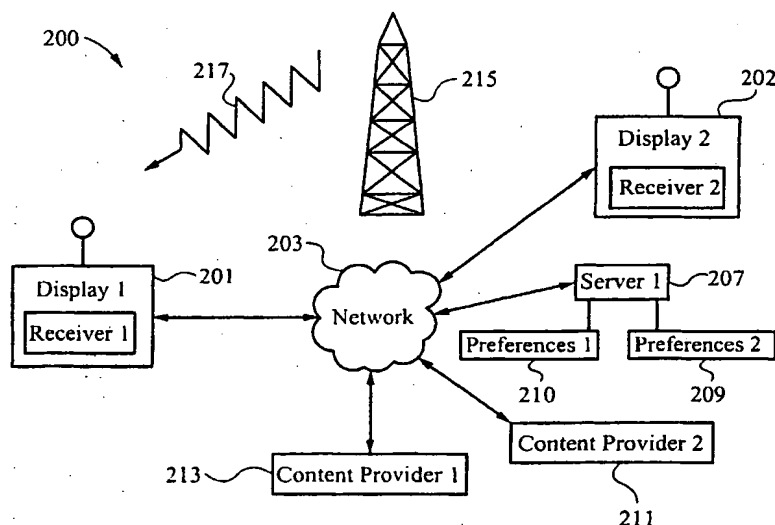

(57) Abstract: The current invention provides a system for distributing content data to user locations. The content data is preferably comprises digital video data that is available on demand from a requesting location. A system server stores user accounts and generates customized program schedules for the user account based user criteria which includes user preferences. Authorized users access their accounts to modify user criteria and to select program transmissions. Preferably, a computer and a television set receive program transmissions from a system network, wherein the computer provides a logical interface between the television set and content data transmitted over the system network.

WO 02/09431 A3

WO 02/09431 A3



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

National Application No  
PCT/US 01/22945

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 11869 A (UNITED VIDEO PROPERTIES INC) 2 March 2000 (2000-03-02)	1-15, 17-21, 25-34, 36,37, 40-42, 45,47-53
Y	<p>page 3, line 12 - line 24  page 4, line 1 - line 9  page 12, line 1 - line 6  page 42, line 23 - line 24  page 45, line 7 - line 22  page 49, line 22 - page 50, line 8  page 51, line 24 - line 33</p> <p>---</p> <p>-/---</p>	35,43, 44,46

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

22 February 2002

Date of mailing of the international search report

01/03/2002

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3018

Authorized officer

Sindic, G

# INTERNATIONAL SEARCH REPORT

national Application No  
PCT/US 01/22945

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 98 26584 A (PREVUE INTERNATIONAL INC) 18 June 1998. (1998-06-18) page 13, line 3 - line 6 page 18, line 21 - line 32 page 21, line 1 - line 7 page 22, line 9 - line 26 page 24, line 18 - line 25 -----	35
Y	US 6 029 045 A (KAU JONATHAN S ET AL) 22 February 2000 (2000-02-22) column 3, line 15 - line 30 column 7, line 30 -column 8, line 22 -----	43,44,46



# INTERNATIONAL SEARCH REPORT

Information on patent family members

national Application No

PCT/US 01/22945

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0011869	A	02-03-2000	AU 5682899 A BR 9913180 A CN 1319307 T EP 1099347 A1 WO 0011869 A1	14-03-2000 15-05-2001 24-10-2001 16-05-2001 02-03-2000
WO 9826584	A	18-06-1998	AU 5696898 A BR 9714391 A CN 1244990 A EP 0945003 A1 HU 0000446 A2 JP 2001506095 T NO 992703 A PL 334062 A1 WO 9826584 A1 AU 8913098 A EP 1008260 A1 WO 9914947 A1	03-07-1998 16-05-2000 16-02-2000 29-09-1999 28-06-2000 08-05-2001 09-08-1999 31-01-2000 18-06-1998 05-04-1999 14-06-2000 25-03-1999
US 6029045	A	22-02-2000	AU 1812999 A WO 9930493 A1	28-06-1999 17-06-1999